
briteair

Floor Swirl Diffuser

Our Floor Swirl Diffuser is suitably reinforced for heavy duty floor usage and is available in either Stainless Steel or Powder Coated Mild Steel.

The swirl element is adjustable to provide both a horizontal air pattern for displacement applications or a vertical projection for high induction twist applications.



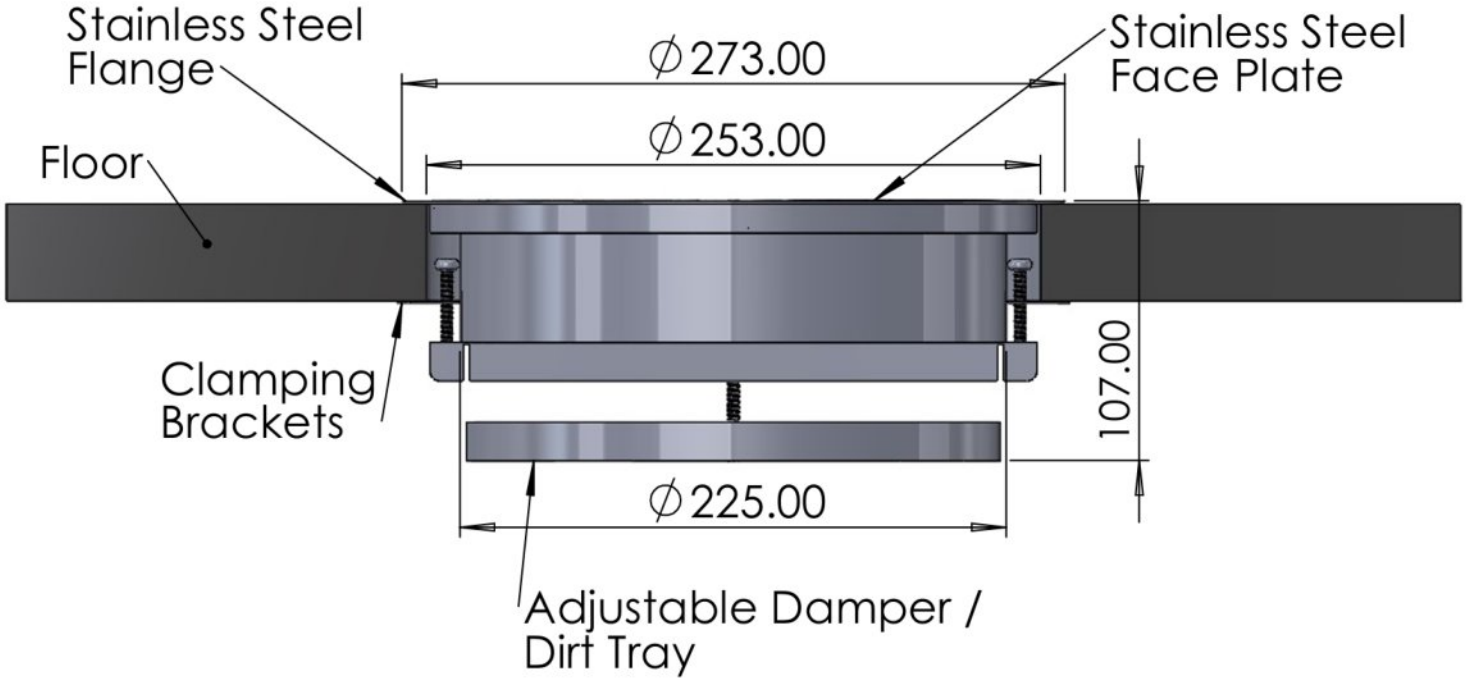

Performance Data - Floor Swirl Diffuser

L/s	15	20	25	30	35	40
Pa	5	8	12	16	23	28
Noise Level db (A)	10	16	22	26	30	34

*Please contact our **Sales Office on 01924 444 174** for selection guidance on the above.*

briteair SYSTEMS LTD


Briteair Systems Ltd
Unit 2, Norquest Ind Park, Pennine View, Birstall, West Yorkshire WF17 9NE

Tel: 01924 444 174 | Fax: 01924 476 600 | www.briteair.co.uk


briteair

Floor Swirl Diffuser


Fixing Method

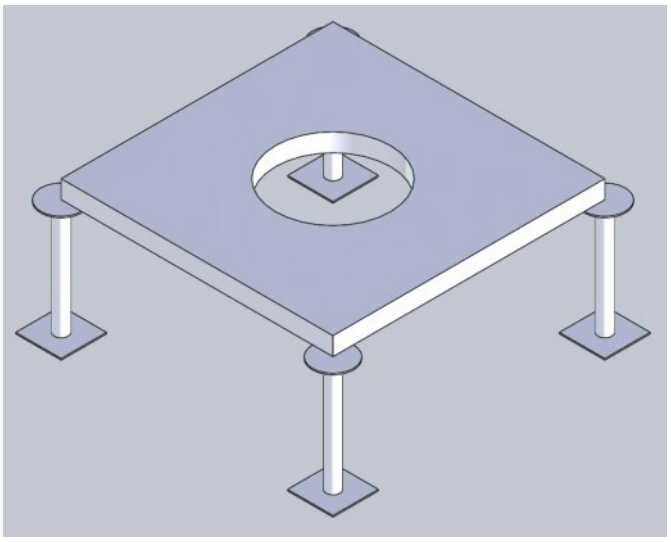


Cut a 255mm diameter hole in the floor tile.

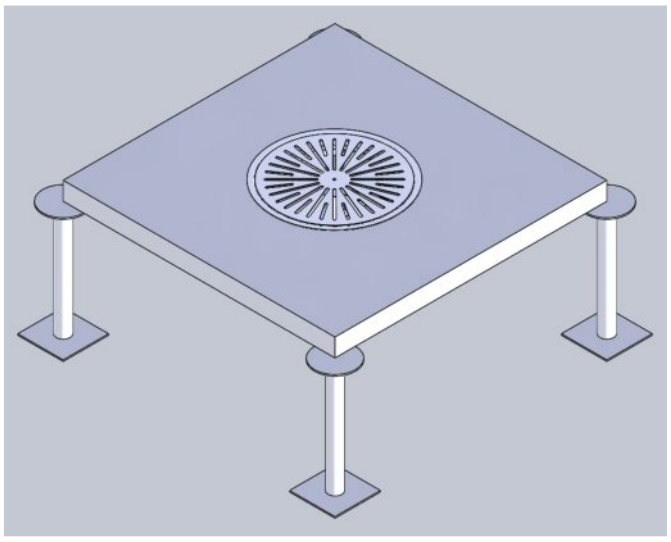

Place the floor swirl diffuser into the hole.

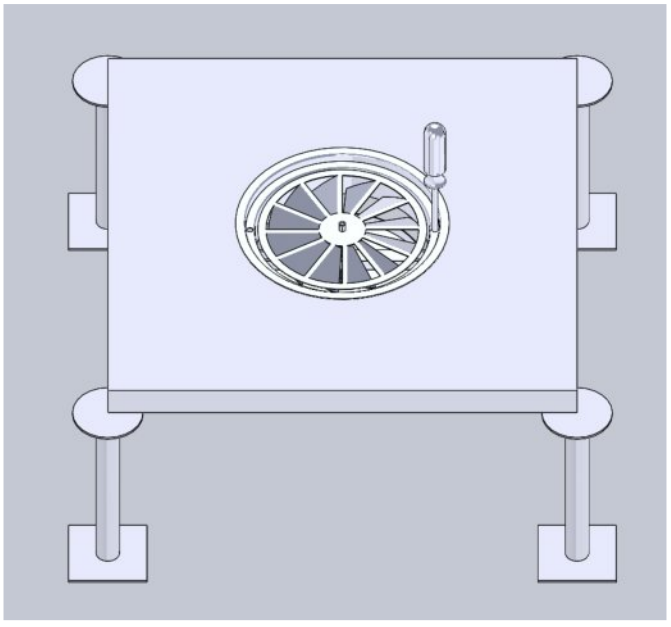

Remove the stainless steel lid and secure the floor swirl diffuser to the tile by tightening the two fixing screws through the holes.

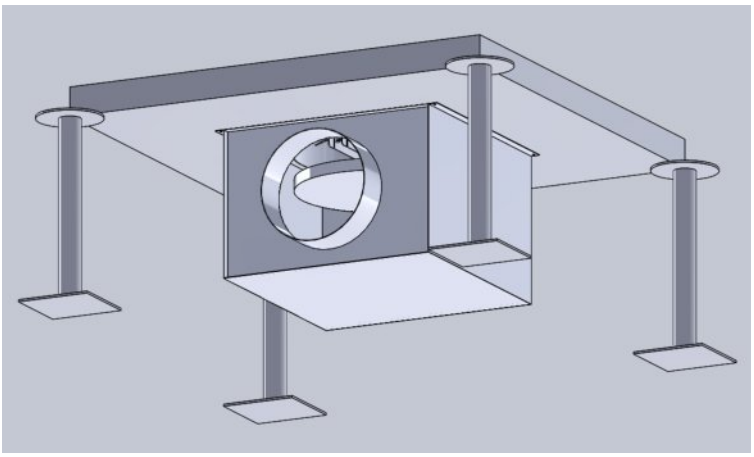

The plenum box is attached to the back of the tile, fixing by others.

*Please contact our **Sales Office on 01924 444 174** for selection guidance on the above.*

briteair SYSTEMS LTD

Briteair Systems Ltd
Unit 2, Norquest Ind Park, Pennine View, Birstall, West Yorkshire WF17 9NE

Tel: 01924 444 174 | Fax: 01924 476 600 | www.briteair.co.uk

briteair

Floor Swirl Diffuser





Please contact our ***Sales Office on 01924 444 174*** *for selection guidance on the above.*

briteair SYSTEMS LTD

Briteair Systems Ltd
Unit 2, Norquest Ind Park, Pennine View, Birstall, West Yorkshire WF17 9NE

Tel: 01924 444 174 | Fax: 01924 476 600 | www.briteair.co.uk